


Semi-Permanent Rope Fences

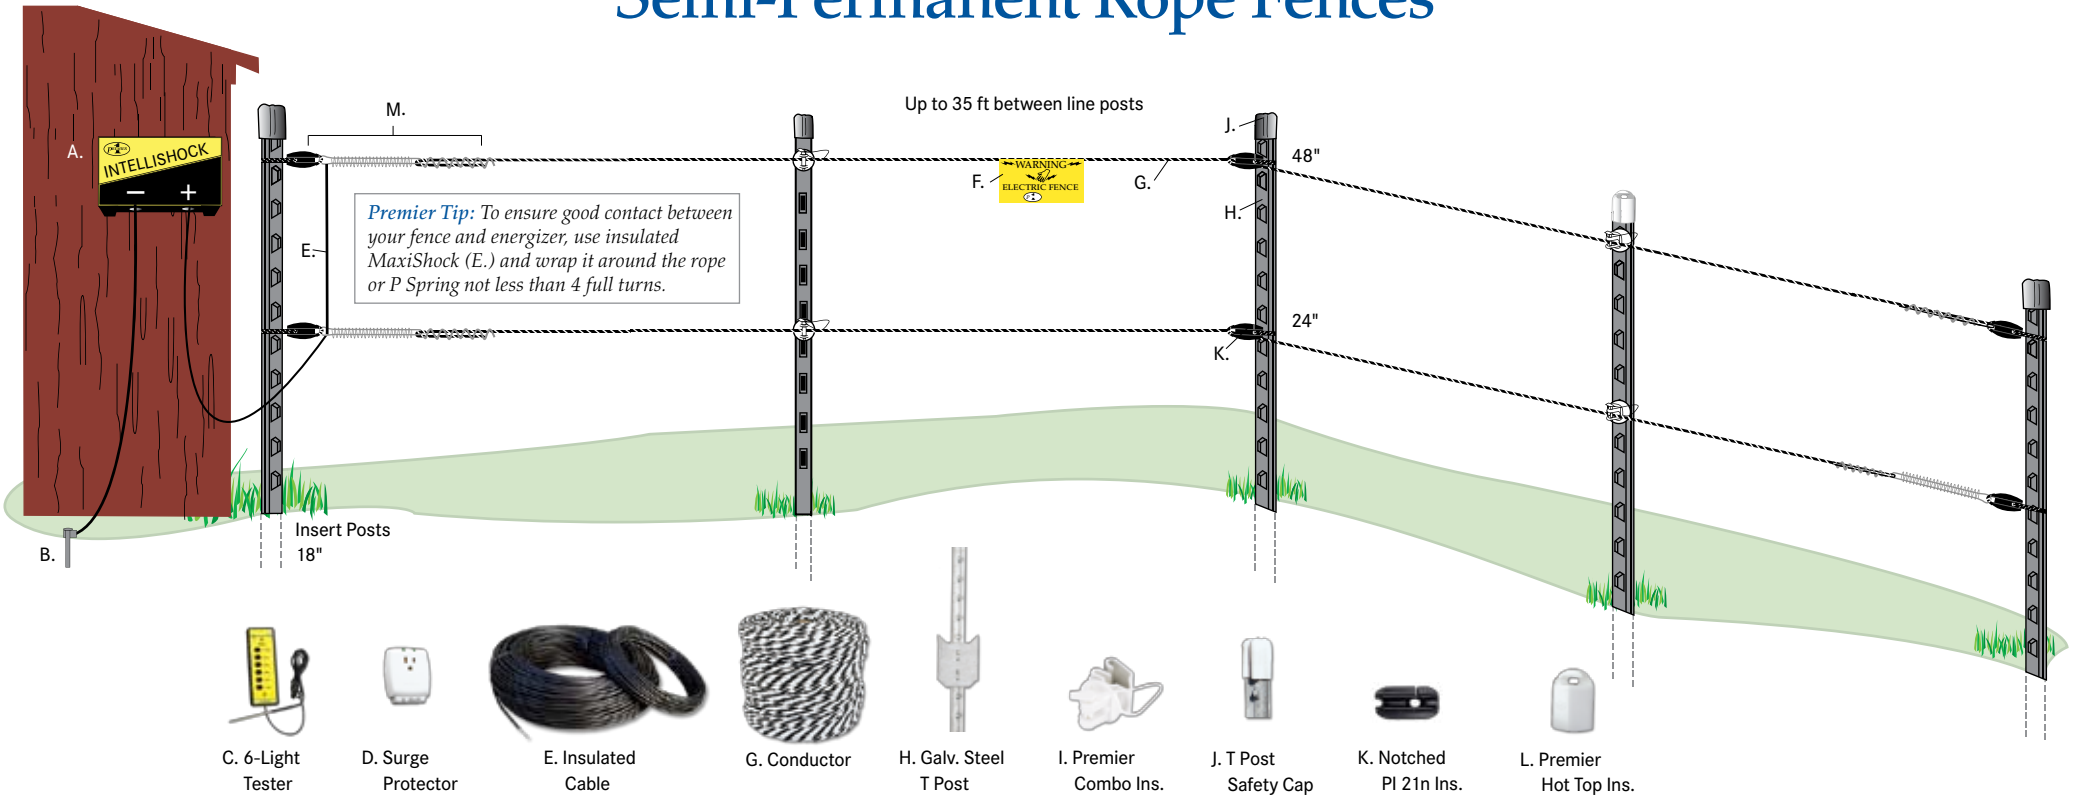

To install

Tools: Driver for wood and steel posts, hammer, screwdriver, cutter for rope and wire, battery drill and our driver to install insulators on wood posts.

Time: 600 ft in 3 hours *after* end, corner & line posts are installed.

Skill: No special skills. *Wooden end and corner posts set 42" to 48" deep in firm soil are advised if more than 2 strands will be used.*

Fence diagram

| Product Name | Item | Price |
|-----------------------------------|---------|---------|
| A. Battery or Plug-in Energizers | | |
| B. Galv. Rod, 6' x 5/8", 6 lb | #151000 | \$8.00 |
| Galv. Rod, 3' x 1/2", 2.3 lb | #151200 | \$3.75 |
| Stainless Clamp, 0.1 lb | #151800 | \$1.35 |
| C. 6-Light Tester, 0.2 lb | #134100 | \$15.00 |
| D. Surge Protector, 0.8 lb | #156500 | \$10.00 |
| E. Insulated Cable | | |
| F. Warning Sign, 0.1 lb | #346000 | \$0.80 |
| G. IntelliRope PE 4.5, 660', 5 lb | #245100 | \$29.00 |
| IntelliRope PE 4.5, 1320', 10 lb | #245200 | \$58.00 |
| IntelliRope PE 6.0, 660', 8.2 lb | #256900 | \$43.00 |
| IntelliRope PE 6.0, 1320', 18 lb | #256910 | \$86.00 |

| Product Name | Item | Price |
|---------------------------------|---------|---------|
| H. Galv. Steel T Post, 6', 9 lb | #327600 | \$11.25 |
| I. Premier Combo Ins., 0.1 lb | #380321 | \$0.24 |
| J. T Post Safety Cap, 0.1 lb | #381010 | \$0.38 |
| K. Notched PI 21n Ins., 0.1 lb | #369200 | \$0.90 |
| L. Premier Hot Top, 0.2 lb | #381000 | \$0.65 |
| M. P Spring Combination | | |
| 1. PI 21 Terminal Ins., 0.1 lb | #369100 | \$0.40 |
| 2. SS P Spring, 0.3 lb | #255010 | \$2.95 |
| 3. RopeLink 2.0, 0.1 lb | #256210 | \$0.68 |

Items not shown

| Product Name | Item | Price |
|--------------------------------|---------|--------|
| Rope-to-Energizer Link, 0.2 lb | #335600 | \$6.25 |