


Semi-Permanent Rope Fence up to 5 strands

Click on the products and photos below to view on our website.



www.premier1supplies.com

800-282-6631 • Washington, IA

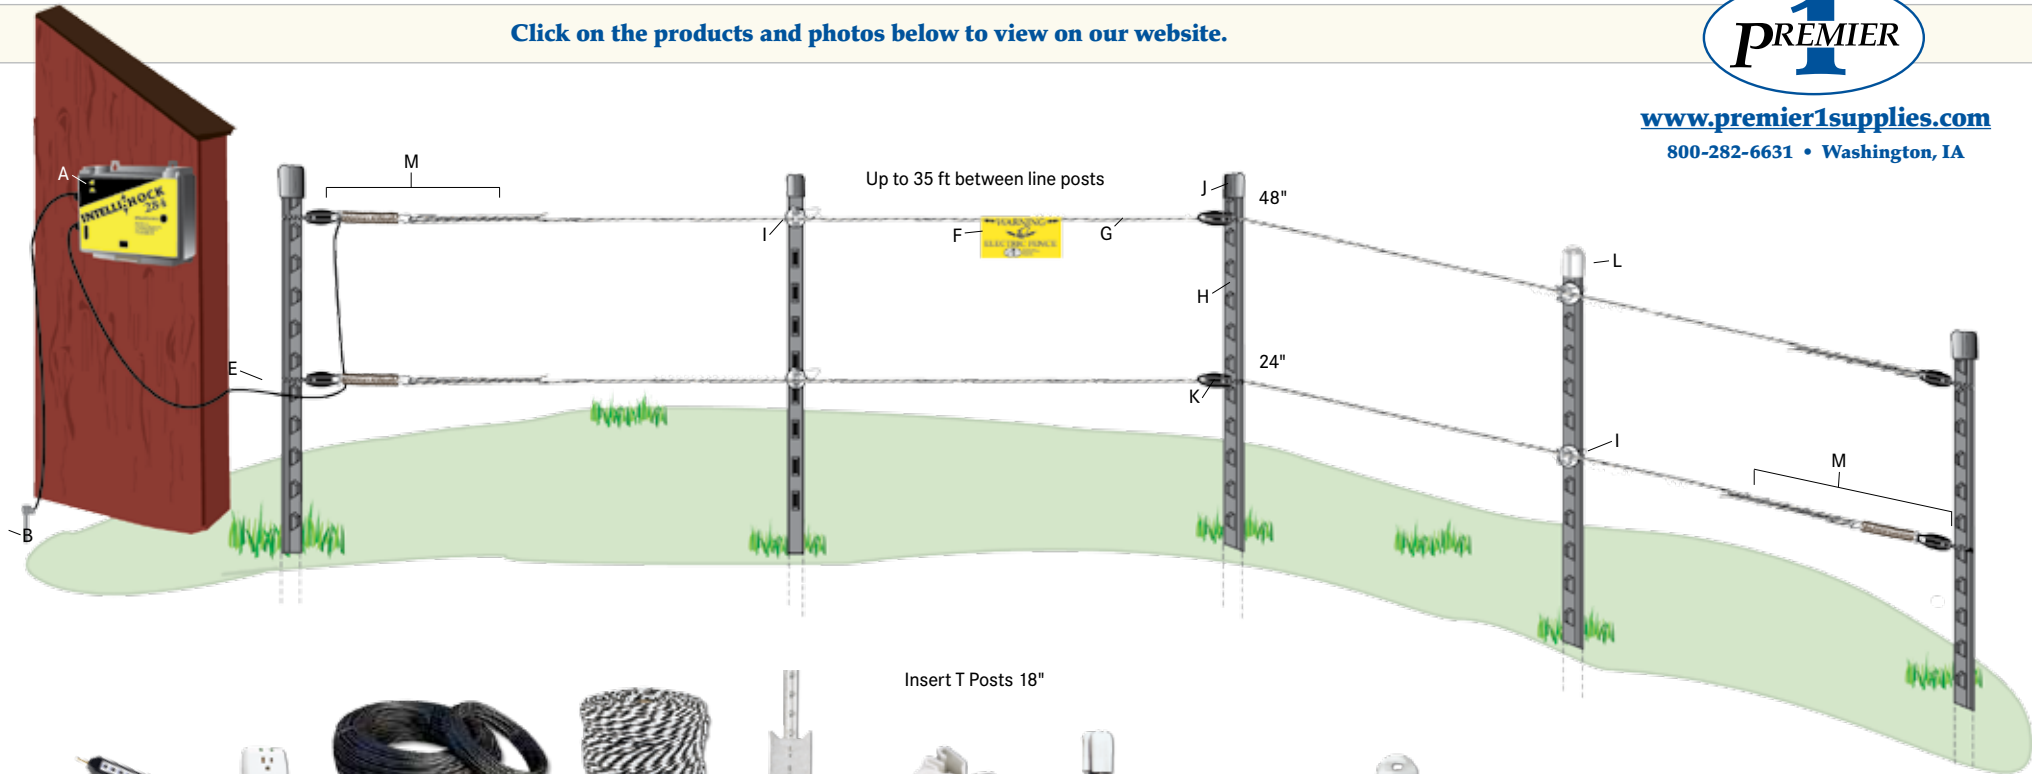

C. 5-Light Tester

D. Surge Protector

E. Insulated Cable

G. Conductor

H. Galv. Steel T Post

I. Premier Combo Ins.

J. T Post Safety Cap

K. Notched PL 21n Ins.

L. Premier Hot Top Ins.

M. (3.)

M. (2.)

M. (1.)

Fence diagram

Product Name Item

- A. [Battery, Plug-in or Solar Energizers](#)
- B. Galv. Rod, 6' x 5/8", 6 lb..... #151000
Galv. Rod, 3' x 1/2", 2.10 lb..... #151200
Stainless Clamp, 0.10 lb..... #151800
- C. 5-Light Tester, 0.24 lb..... #134100
- D. Surge Protector, 0.20 lb..... #156500
- E. Insulated Cable
- F. Warning Sign, 0.06 lb..... #346000
- G. IntelliRope PE 4.5, 660', 5 lb..... #245100
IntelliRope PE 4.5, 1320', 10 lb... #245200
IntelliRope PE 6.0, 660', 8.20 lb.. #256900
IntelliRope PE 6.0, 1320', 18 lb... #256910
- H. Galv. Steel T Post, 6', 9 lb..... #327600
- I. Premier Combo Ins., 0.10 lb..... #380321

Product Name Item

- J. T Post Safety Cap, 0.06 lb..... #381010
- K. PL 21n Notched Ins., 0.08 lb..... #369200
- L. Premier Hot Top, 0.20 lb..... #381000
- M. P Spring Combination
1. PL 21 Terminal Ins., 0.08 lb..... #369100
2. P Spring, SS, 0.30 lb..... #255010
3. RopeLink 2.6, 0.10 lb..... #256210
- N. Rope Tensioner/Ins., 0.15 lb..... #255020

Items not shown

- Product Name Item
- Rope-to-Energizer Link, 0.20 lb..... #335600

M. (1.) PL 21 Terminal Insulator

M. (2.) P Spring

M. (3.) RopeLink 2.6



N. Rope Tensioner/Insulator

To install

Tools: Driver for wood and steel posts, hammer, screwdriver, cutter for rope and wire, battery drill and our driver to install insulators on wood posts.

Time: About 600 ft in 3 hours after end, corner and line posts are installed.

Skill: No special skills. Set steel end and corner posts 20-35 ft apart. If using more than 2 strands, wood and corners are advised 42" to 48" deep in firm soil.