

Permanent 3D Anti-Deer

To view on our website – Click on the links & video below.



www.premier1supplies.com

800-282-6631


To install and maintain

1. Drive the posts.
2. Attach insulators/clips.
3. Unroll, insert and tension rope.
4. Attach scent caps.
5. Bait the caps with apple scent. Scent caps should be refilled with apple scent before a season of high deer activity and ideally every 10 days during high-activity seasons.

Examples:

- For rubbing damage this is in the autumn before the rut.
 - For browsing damage it depends on plant species being browsed.
6. Electrify with a suitable energizer—the very same day it's installed!
 7. Check voltage—3500 minimum. Voltage should be monitored every week.

8. Perform semiannual maintenance. Expect to tension the rope and reset some of the FiberRod posts.
9. Weed growth under electrified ropes needs to be removed once each summer by mowing or by applying long-term herbicides.

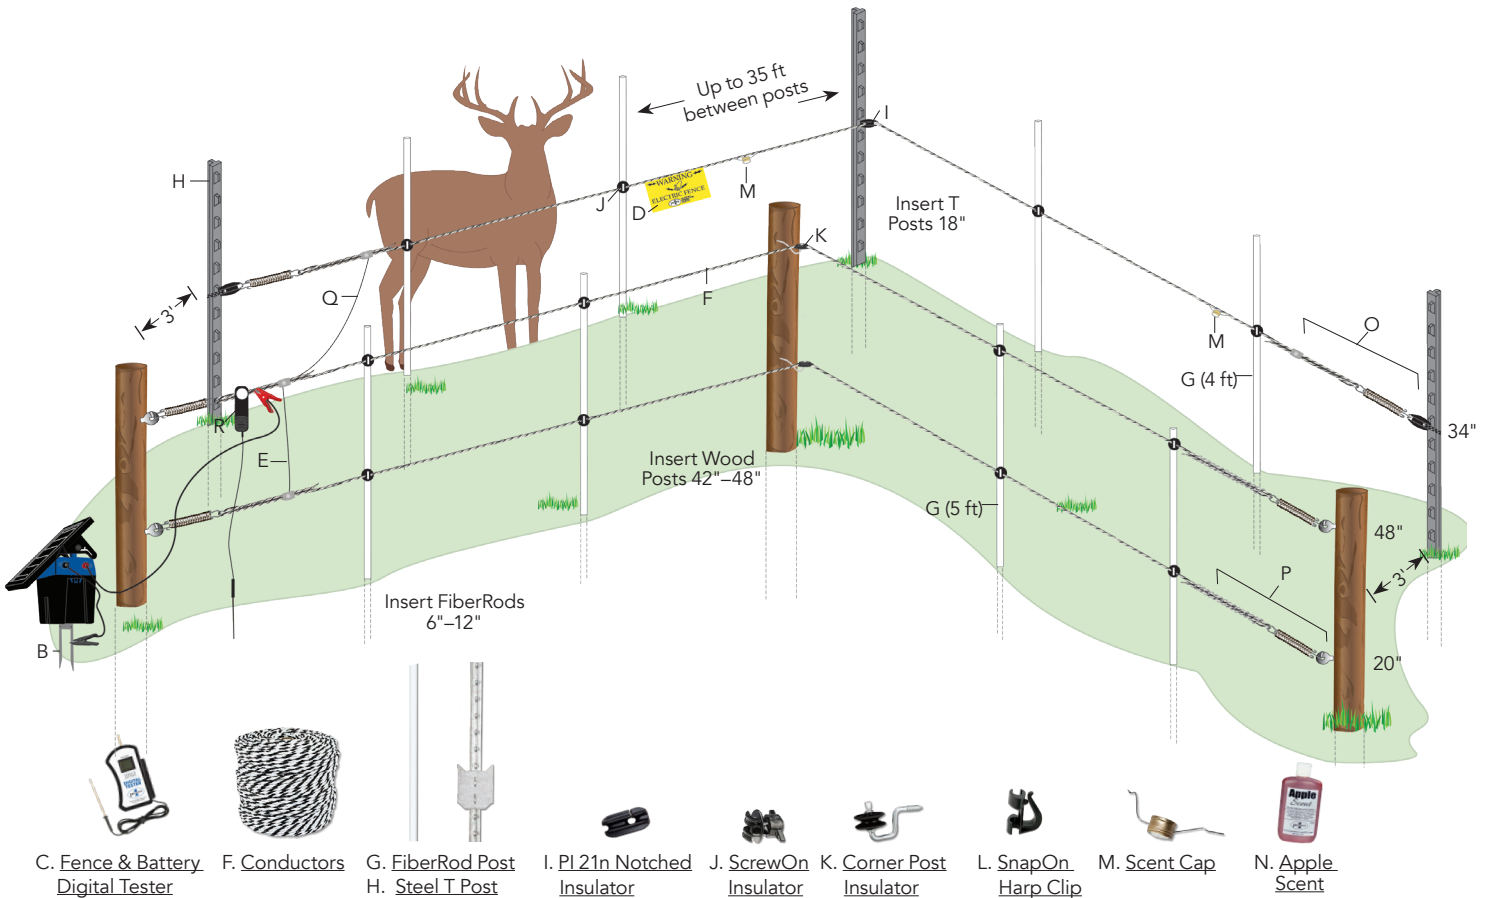


- C. Fence & Battery Digital Tester F. Conductors G. FiberRod Post I. PI 21n Notched Insulator J. ScrewOn Insulator K. Corner Post Insulator L. SnapOn Harp Clip M. Scent Cap N. Apple Scent

Fence diagram

Product Name	Item
A. Energizers	
B. Ground Rod, 6' x 5/8"	#151000
Stainless Steel Clamp	#151800
C. Fence & Battery Digital Tester	#200006
D. Warning Sign	#346000
E. Rope-to-Rope Link	#335610
F. IntelliRope PE 4.5, 660'	#245100
IntelliRope PE 6.0, 660'	#256900
EnduraSoft 6.0, 660'	#256500
G. FiberRod Post, 4', 3/8"	#321841
FiberRod Post, 5', 3/8"	#321851
H. Galvanized Steel T Post, 6'	#327600
I. PI 21n Notched Insulator	#369200

Product Name	Item
J. ScrewOn Insulator	#325400
K. Corner Post Insulator	#380900
L. SnapOn Harp Clip Insulator	#325310
M. Scent Cap	#256300
N. Apple Scent	#256404
O. 1. PI 21 Terminal Insulator	#369100
2. P Spring, SS	#255010
3. Rope Connector 1.0	#256200
P. 1. RopeLink 2.6	#256210
2. P Spring	#255010
3. TuffRing II Insulator	#380705
Q. Insulated Wire	
R. Live Fence Indicator	#133515

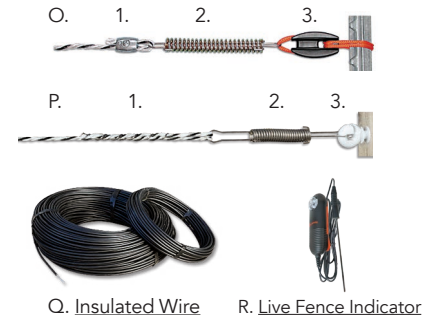

Q. Insulated Wire R. Live Fence Indicator