


# PRS 100x Instructions




1. Looking at the inside of the PRS unit as in the picture, remove the left foam battery cover and set aside.




2. Unscrew the bolt of the red "+" battery terminal. Remove red tape from red "+" wires. Bolt the red wires to the red "+" terminal. Washers should be between the bolt and the wire. Red wires and terminal connection should appear as shown on left.

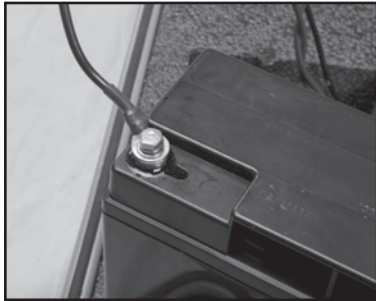


3. Remove plastic terminal cover and unscrew the bolt from the black "-" terminal. With washers still on the bolt, attach the black "-" wire to the "-" terminal.




4. Replace foam lid.

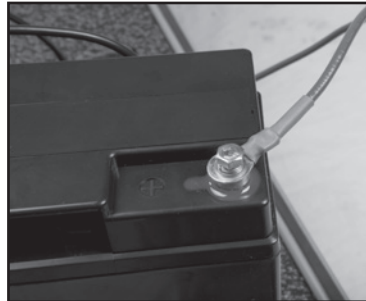

5. Remove right foam battery cover and set aside. Unscrew the bolt from the red "+" terminal of the battery. Remove red tape from red "+" wire and bolt to the terminal, use same method as step 2.

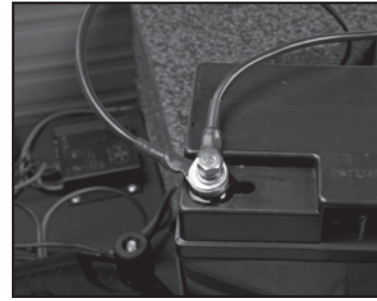

6. Unscrew the bolt from the "-" terminal and bolt in black "-" wires.

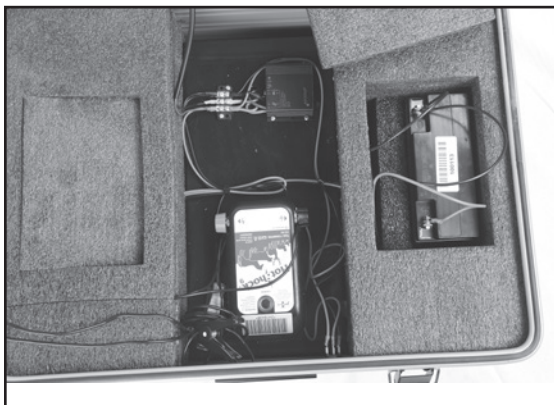

7. Place battery back into the foam pocket. The wires should be on top of the battery. Replace foam lid.



8. Close and secure energizer lid. Do not shut black and red fence leads in the case.

## Connecting the PRS



1. Insert ground rod next to the energizer. Then connect black clip to the ground rod (as shown above).



2. Attach red clip to the portion of the fence that is to be energized.



3. Turn on the energizer on/off switch between the latches on the energizer.



www.premier1supplies.com  
800-282-6631