

PRS 100x Instructions



1. Looking at the inside of the PRS unit as in the picture, remove the left foam battery cover and set aside.



2. Lift the battery out of the foam pocket and set on the energizer case as shown. In the left pocket are 3 wires, 2 are red "+" and one is black "-".



3. Unscrew the bolt of the red "+" battery terminal. Remove red tape from red "+" wires. Bolt the red wires to the red "+" terminal. Washers should be between the bolt and the wire. Red wires and terminal connection should appear as shown on left.



4. Remove plastic terminal cover and unscrew the bolt from the black "-" terminal. With washers still on the bolt, attach the black "-" wire to the "-" terminal.




5. Place battery back into the foam pocket. The wires should be on top of the battery.



7. Lift the right battery out of the foam pocket and set on the energizer case. In the right pocket are 3 wires, 1 is red "+" and 2 are black "-".



9. Unscrew the bolt from the "-" terminal and bolt in black "-" wires.

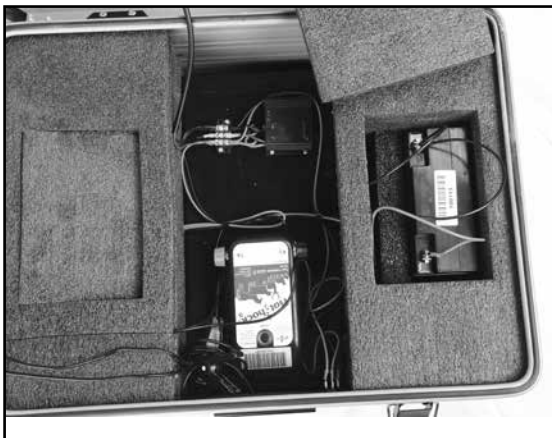

10. Place battery back into the foam pocket. The wires should be on top of the battery. Replace foam lid.



8. Unscrew the bolt from the red "+" terminal. Remove red tape from red "+" wire and bolt to the terminal, use same method as step 3.



11. Close and secure energizer lid. Do not shut black and red fence leads in the case.

Connecting the PRS



1. Insert ground rod next to the energizer. Then connect black clip to the ground rod (as shown above).



2. Attach red clip to the portion of the fence that is to be energized.



3. Turn on the energizer on/off switch between the latches on the energizer.



www.premier1supplies.com
800-282-6631