

Horses—up to 5 strands

A very popular horse fence due to its low cost and ease/speed of installation compared to vinyl, wood or woven-wire permanent horse fences.

Consists of up to 5 strands of electrifiable long-lasting rope strained between wood end and corner posts, supported by wood or steel line posts.

Spacing of line posts (not more than 35 ft) must be adjusted to terrain. Always put a post at top of hills and bottom of valleys. Vary the spacing of rope strands according to type and size of horse(s), fence usage (boundary vs subdivision) and the number of strands.



Cattle—low-tension fence with up to 3 strands of rope

Consists of up to 3 electrified strands of IntelliRope, EnduraSoft or IntelliBraid. These conductors withstand wind, snow and light ice storms better than twine, polywire or tape.

Hand-tension (25 to 40 lb) and supported with steel, wood, fiberglass or plastic line posts spaced up to 40 ft apart. Steel T posts and wood line posts are more expensive than FiberRods™ or step-in posts but are stronger, can take more side-strain and are more reliable year-round. End and corner posts are steel or wood.

Because the rope is pulled only hand-tight, this fence design is better than HT wire fences for irregular fence lines that curve or go up and down frequently. The fence is also simple and rapid to install and remove.

A wide-impedance energizer is advised for most “4-season” fences (a fence that must work when grass stays brown or snow covers the ground).



Sheep/Goats—multi-strand (without reels)

Low-cost design for fences expected to remain in place less than 5 years.

Conductors (twine, tape, rope and/or MaxiShock™) are hand-tensioned. End and corner posts are steel T or wood. Line posts are FiberRod™ or steel T posts.

Up to 7 strands in response to predator and livestock pressure. We prefer 4 strands of IntelliTwine™ and 1 IntelliRope PE 4.5 for perimeter fences—and 2 IntelliTwine with 1 IntelliRope PE 4.5 for internal fences.

For dry or snow-covered sites, alternating the hot/ground connections is advised.

Regular maintenance (every 2 months) is required to adjust tension of conductors and reset any loose line posts. Tree limbs that happen to fall upon the fence must be removed immediately.

***Please Read!** In 1991, an accidental fatality occurred when a very young child's head came in contact with an electrified fence wire while the child was crawling through wet grass. The fence was correctly installed and functioning properly. The energizer was a small plug-in unit and UL approved. The fence wire was electroplastic twine—a relatively poor conductor compared to steel, copper or aluminum wire.*

We strongly caution adults to keep all small children away from all electrified fences. Children should be warned not to play in an area where electrified fences exist. Individuals of all ages should take extra care to avoid accidentally contacting electrified fences with the head and neck.

Installation Instructions

- IntelliRope® PE 6.0
- EnduraSoft® 6.0
- IntelliBraid™ 6.0



www.premier1supplies.com

800-282-6631

Washington, IA

© Copyright 2016, Premier1Supplies. All rights reserved.

#111111


To install

If posts are power-driven, only a battery drill, cutters and screwdriver are needed. We do 500 ft in 2 hours if posts are already in place.


- 1. Install wood end, corner and line posts.
- 2. Attach insulators to posts.
- 3. Attach rope to one end.
- 4. Clip rope into insulators. Pull until the P Spring is 50% compressed. Terminate it.
- 5. Connect ropes together electrically at one end with a piece of insulated wire or Rope-to-Rope Link.
- 6. Install and connect the energizer. Voltage should be over 1500 volts.

Suggested heights

- For Horses:
5 strands—60", 48", 36", 24", 12"
2 strands—48", 24"
- For Sheep/Goats:
5 strands—36", 27", 20", 13", 7"
3 strands—27", 15", 7"
- For Cattle:
3 strands—40", 27", 15"
2 strands—34", 27"
1 strand—34"

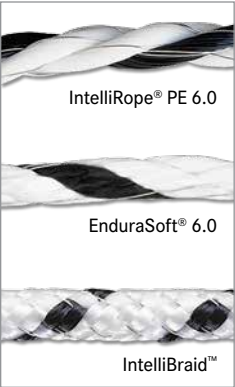

Illustrates the visibility of Premier's black/white ropes against different backgrounds.

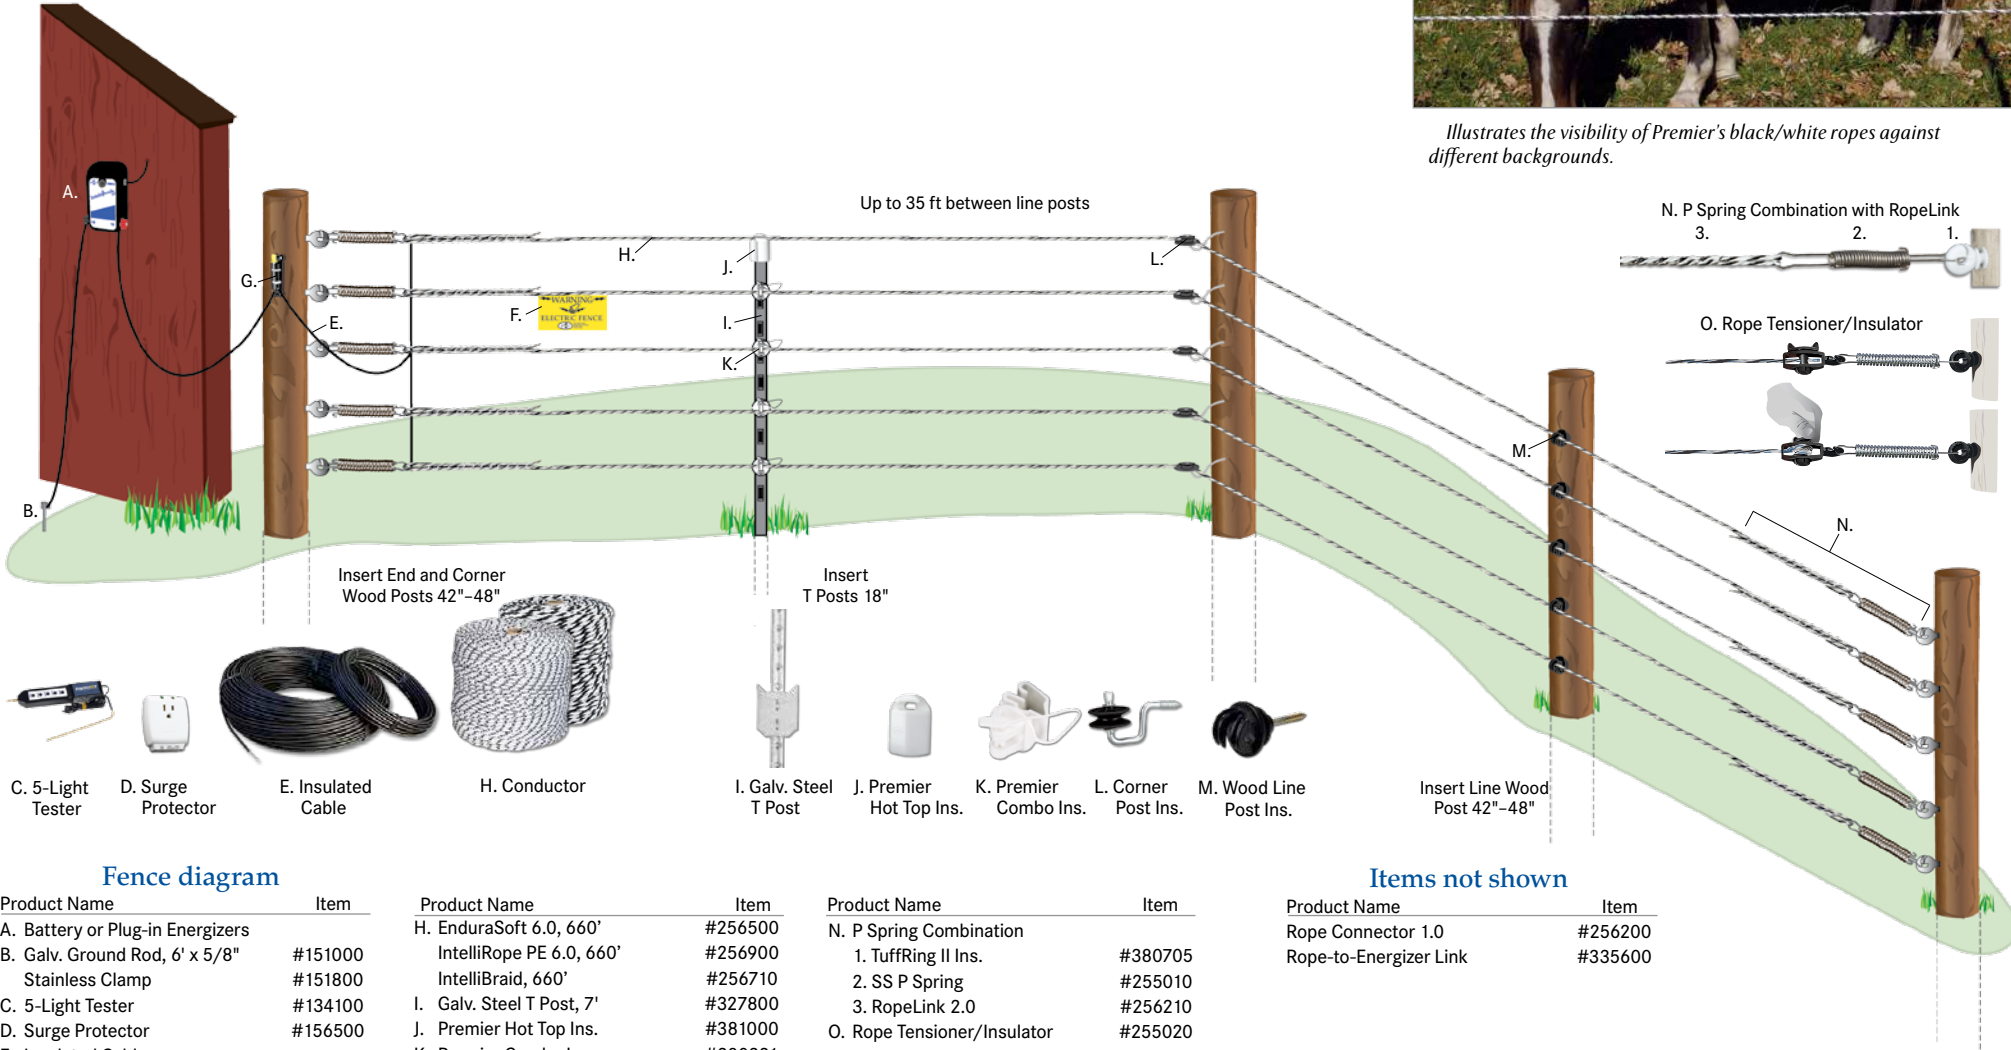

- C. 5-Light Tester
D. Surge Protector
E. Insulated Cable
H. Conductor
I. Galv. Steel T Post
J. Premier Hot Top Ins.
K. Premier Combo Ins.
L. Corner Post Ins.
M. Wood Line Post Ins.

Fence diagram

Product Name	Item	Product Name	Item
A. Battery or Plug-in Energizers		H. EnduraSoft 6.0, 660'	#256500
B. Galv. Ground Rod, 6' x 5/8"	#151000	IntelliRope PE 6.0, 660'	#256900
C. 5-Light Tester	#151800	IntelliBraid, 660'	#256710
D. Surge Protector	#134100	I. Galv. Steel T Post, 7'	#327800
E. Insulated Cable	#156500	J. Premier Hot Top Ins.	#381000
F. Warning Sign	#346000	K. Premier Combo Ins.	#380321
G. Cut-Out Switch	#333000	L. Corner Post Ins.	#380900
		M. Wood Line Post Ins.	#380712

Items not shown

Product Name	Item
N. P Spring Combination	
1. TuffRing II Ins.	#380705
2. SS P Spring	#255010
3. RopeLink 2.0	#256210
O. Rope Tensioner/Insulator	#255020

Product Name	Item
Rope Connector 1.0	#256200
Rope-to-Energizer Link	#335600