
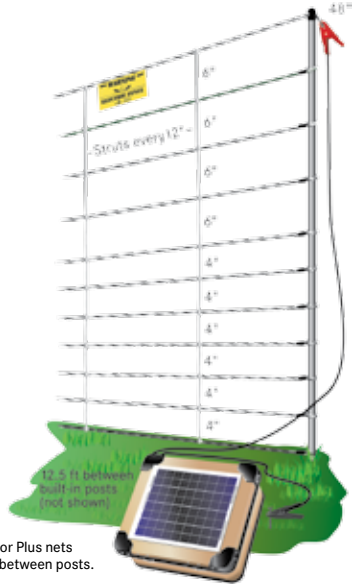


ElectroFence® 11/48/12

Click on the products, photos & videos below to view on our website.

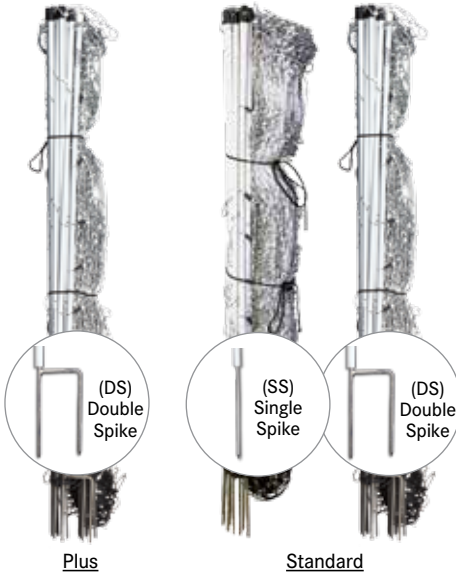

For Plus nets
6"8" between posts.

To purchase ElectroFence

1. Measure the fence line.

2. Choose the length and the amount of netting needed.

Example:
For a 140 ft fence line, order a 100 ft net and one 82 ft net and a 50 ft net.

3. Choose support posts—

- 6 ft steel T posts drive 18" deep are advised for ends.
- FiberTuff 22 posts work for support at ends and corners.

4. Select an energizer, ground rod and a fence tester—

View Premier's [Energizer Comparison Chart](#).



Plus and Standard Netting

ElectroFence Plus (DS - double spike)

100' x 48", 23 lb	#204520
50' x 48", 12 lb.....	#204521

ElectroFence (SS - single spike)

100' x 48", 15 lb	#204500
50' x 48", 8.15 lb.....	#204501
Pos/Neg 100' x 48", 15.87 lb.....	#204515*

*If dry conditions occur frequently, the Pos/Neg version is strongly advised.

ElectroFence (DS - double spike)

100' x 48", 18 lb	#204510
50' x 48", 9.70 lb.....	#204511

Energizers & Accessories

Energizers—Battery, Plug-in or Solar

5-Light Tester, 0.24 lb.....#134100

Warning Sign, 0.06 lb.....#346000

PowerLink 4.0, 0.15 lb

(for Pos/Neg netting).....#335500

FiberTuff Post, 35", 1.40 lb.....#208053

Steel T Post, 9 lb.....#327600



www.premier1supplies.com

800-282-6631 • Washington, IA