

# 3D Anti-Deer Fence



Click on the products and photos below to view on our website.

[www.premier1supplies.com](http://www.premier1supplies.com)


800-282-6631 • Washington, IA

## To install and maintain

1. Drive the posts.
2. Attach insulators/clips.
3. Unroll, insert and tension rope.
4. Attach scent caps.
5. Bait the caps with apple scent.
6. Electrify with a suitable energizer—the very same day it's installed!
7. Check voltage—3500 minimum.
8. Perform semiannual maintenance. Expect to tension

- the rope and reset some of the FiberRod posts.
9. Scent caps should be refilled before a season of high deer activity and ideally every 10 days during high-activity seasons. Examples:
    - For rubbing damage this is in the autumn before the rut.
    - For browsing damage it depends on plant species being browsed.

10. Voltage should be monitored every week to ensure it's 3500 or higher.
11. Weed growth under electrified ropes needs to be removed once each summer by mowing or by applying long-term herbicides.

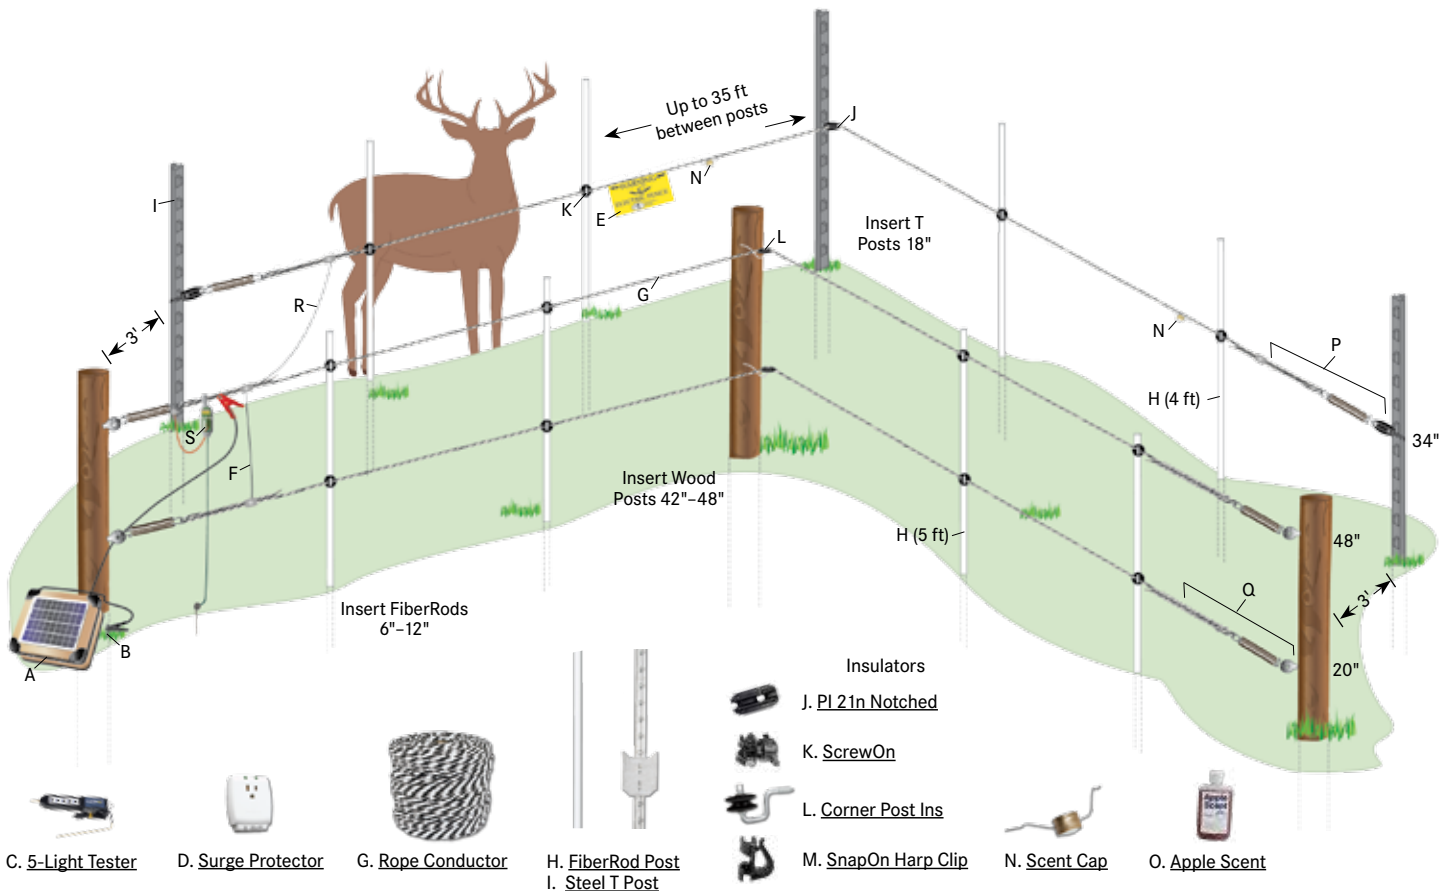

C. 5-Light Tester

D. Surge Protector

G. Rope Conductor

H. FiberRod Post  
I. Steel T Post

Insulators  
J. PI 2In Notched  
K. ScrewOn  
L. Corner Post Ins  
M. SnapOn Harp Clip

N. Scent Cap

O. Apple Scent

## Fencing diagram

| Product Name  | Item    |
|---|---------|
| A. <a href="#">Battery, Plug-In or Solar Energizers</a> |         |
| B. <a href="#">Ground Rod, 6' x 5/8", 6 lb</a>          | #151000 |
| <a href="#">Stainless Steel Clamp, 0.10 lb</a>          | #151800 |
| C. <a href="#">5-Light Fence Tester, 0.24 lb</a>        | #134100 |
| D. <a href="#">Surge Protector, 0.20 lb</a>             | #156500 |
| E. <a href="#">Warning Sign, 0.06 lb</a>                | #346000 |
| F. <a href="#">Rope-to-Rope Link, 0.28 lb</a>           | #335610 |
| G. <a href="#">IntelliRope PE 4.5, 660', 5 lb</a>       | #245100 |
| <a href="#">IntelliRope PE 6.0, 660', 8.20 lb</a>       | #256900 |
| <a href="#">EnduraSoft 6.0, 660', 12 lb</a>             | #256500 |
| H. <a href="#">FiberRod Post, 4', 3/8", 0.38 lb</a>     | #321841 |
| <a href="#">FiberRod Post, 5', 3/8", 0.47 lb</a>        | #321851 |
| I. <a href="#">Galv. Steel T Post, 6', 9 lb</a>         | #327600 |

| Product Name                                       | Item    |
|--|---------|
| J. <a href="#">PI 2In Notched Ins., 0.08 lb</a>    | #369200 |
| K. <a href="#">ScrewOn Ins., 0.10 lb</a>           | #325400 |
| L. <a href="#">Corner Post Ins., 0.20 lb</a>       | #380900 |
| M. <a href="#">SnapOn Harp Clip Ins., 0.10 lb</a>  | #325310 |
| N. <a href="#">Scent Cap, 0.01 lb</a>              | #256300 |
| O. <a href="#">Apple Scent, 4 oz, 0.30 lb</a>      | #256404 |
| P. 1. <a href="#">PI 21 Terminal Ins., 0.08 lb</a> | #369100 |
| 2. <a href="#">P Spring, SS, 0.30 lb</a>           | #255010 |
| 3. <a href="#">Rope Connector 1.0, 0.06 lb</a>     | #256200 |
| Q. 1. <a href="#">TuffRing II Ins., 0.10 lb</a>    | #380705 |
| 2. <a href="#">P Spring, SS, 0.30 lb</a>           | #255010 |
| 3. <a href="#">RopeLink 2.6, 0.10 lb</a>           | #256210 |
| R. <a href="#">Insulated Wire</a>                  |         |
| S. <a href="#">BlitzLight, 0.35 lb</a>             | #132300 |

